

**Read and understand all instruction, warning, and danger labels.**

**Lea el manual de operación anexo sobre ensamblaje e inicio.**

**1**

(A) Lift handle to extended position.  
(B) Tighten star knobs.

**2**

(A) Move hairpin clip to inside hole (hole closest to handle).  
(B) Insert carriage bolt and tighten with wing nut. Repeat on opposite side.

Blade Control Handle

Starter Rope

Star Knobs

Refer to Operator's Manual for instructions on attaching the grass catcher.





**3**

(A) Hold blade control handle against upper handle.  
(B)(C) Slowly pull starter rope from engine and slip starter rope into rope guide.  
(D) Tighten rope guide wing knob.

**4**

Use cable tie to secure cables to lower handle.



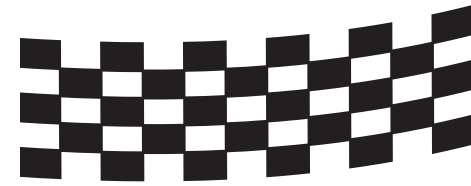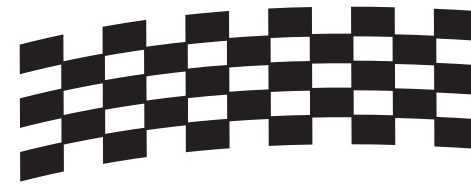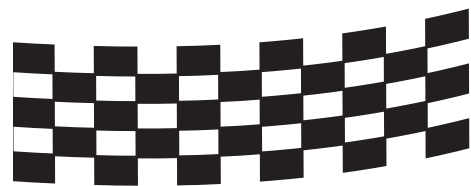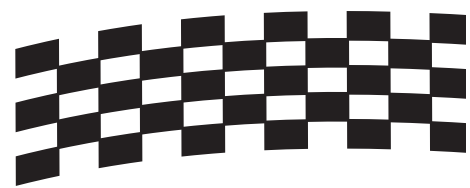

**Read and understand all instruction, warning, and danger labels.**


**Lea el manual de operación anexo sobre ensamblaje e inicio.**

**5**




Fill engine with SAE 10W30 oil to proper level. Check oil level by inserting (and not threading) dipstick into filler neck. Do not overfill.

**6**




Fill tank with fresh gas up to within 1/2-inch of top of tank. Do not use E85 or fuel containing more than 10% Ethanol. Do not overfill.

**a**




**b**

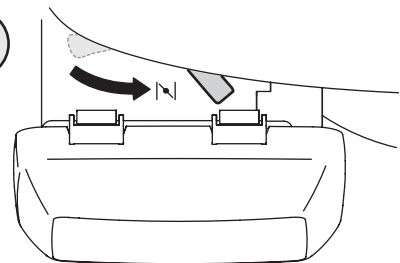


Confirm fuel valve is open (a) and activate choke by moving lever until it stops in the ON position (b). Choke does not need to be activated for warm engine starting.


**7**

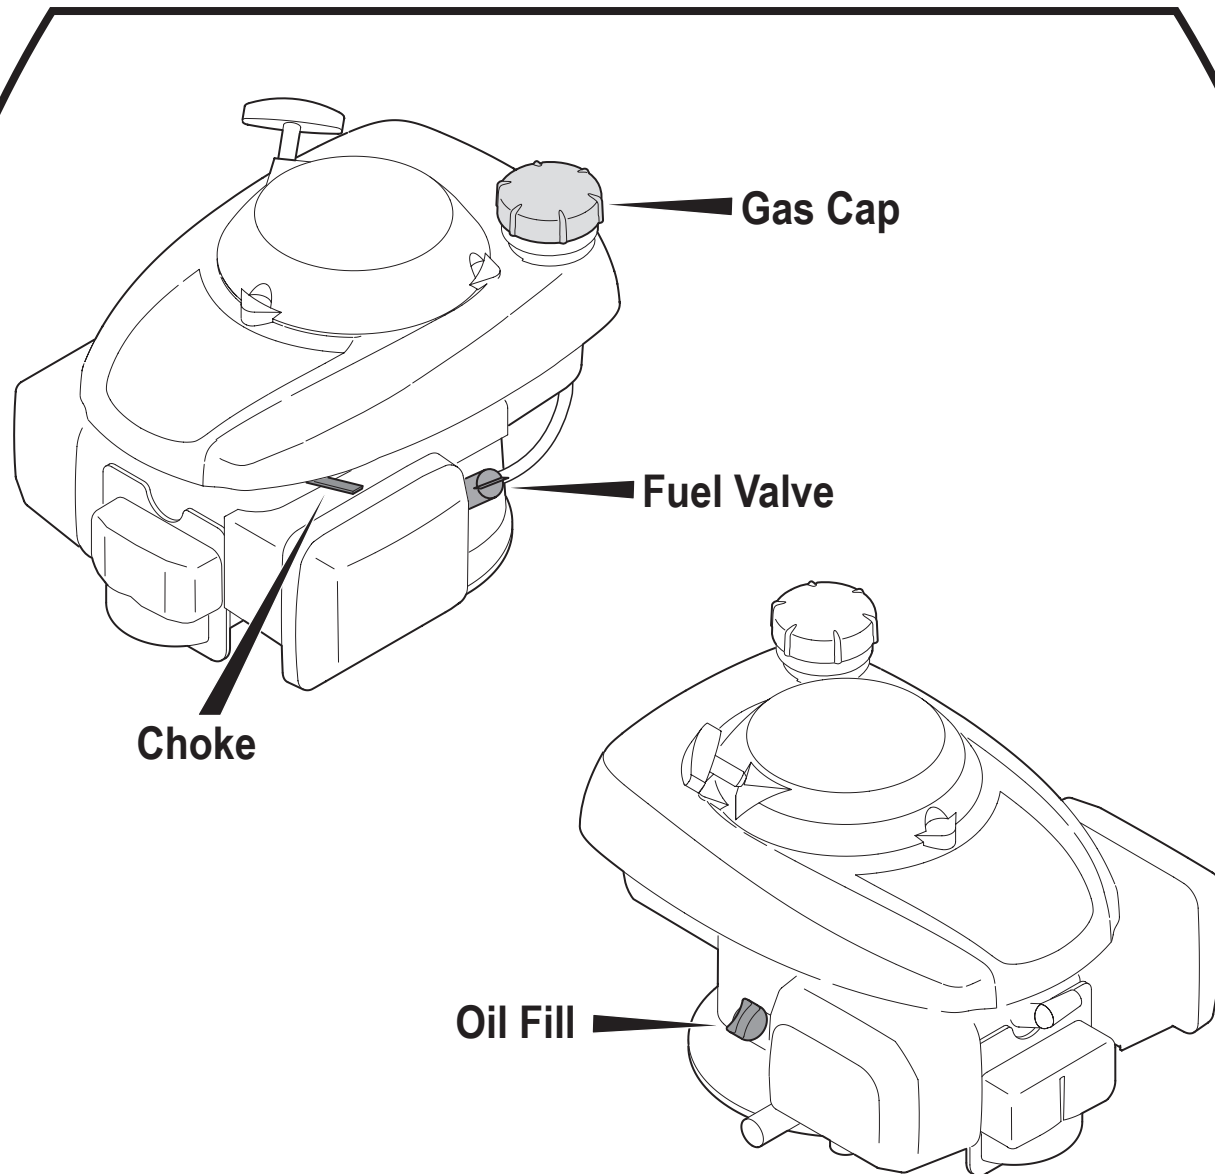

**8**

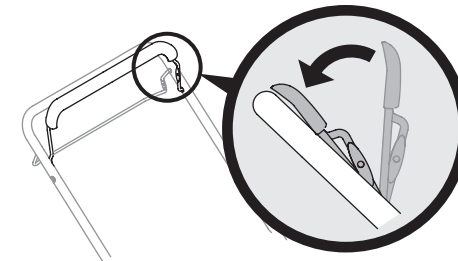

Depress blade control handle and hold. Because the choke will move to OFF position in 6-9 seconds, immediately proceed to step 9 below.

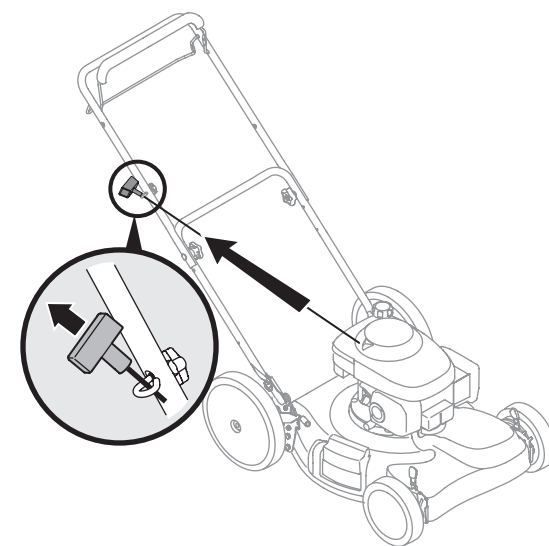

**9**

Pull starter rope with quick, full arm stroke. If engine does not start after 3-4 pulls, repeat steps 7b through 9.

Need Help?

**Call 1-888-TO-HELP-U**



**IMPORTANT: READ OPERATOR'S MANUAL AND ENGINE MANUAL THOROUGHLY AND FOLLOW THE SAFE OPERATION PRACTICES BEFORE OPERATING .**

